


Einnova Solarline

invented for solar

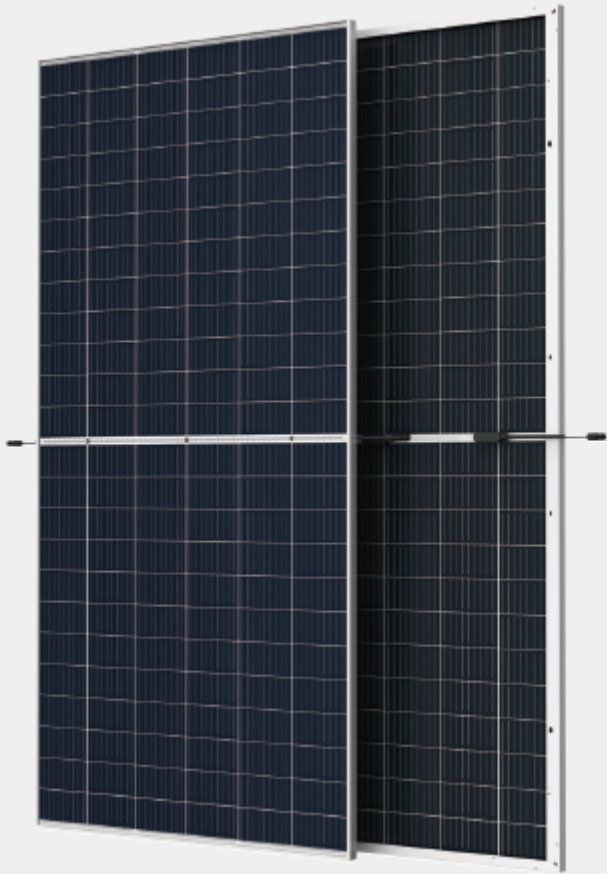

PERC Half Cut Bifacial Mono Crystalline Solar Module
with Transparent Backsheet

ESM 530/535/540/545/550S

KEY FEATURES



Excellent module efficiency up
to: 21.30%



IP68 junction box for long-term
weather endurance



Heavy snow load up to 5400 Pa,
wind load up to 3600 Pa



PID: Selected material and stringent
quality system ensure PID free




Applicable to harsh environment of
deserts, farmlands and seashores



Much lower risk of Hot Spot

CERTIFICATE

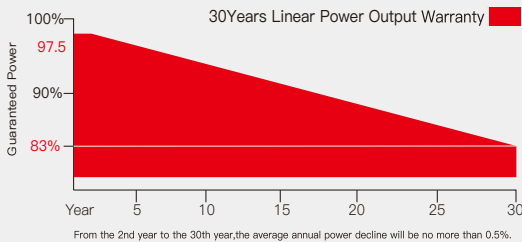

WARRANTY



Linear power output warranty
- 12 years minimum 92% power output
- 30 years minimum 83% power output



Product warranty on materials and workmanship
According to the applicable Einnova Solarline
Limited Warranty Statement

Einnova Solarline Group

5 West Beijing Road,
Nanjing, 210008, China

+86-(0)25-84792033
+86-(0)25-84705923

info@einnova-solarline.com
www.einnova-solarline.com







EN

The specifications are subject to change without prior notice.

Ennova Solarline

invented for solar

IV CURVE

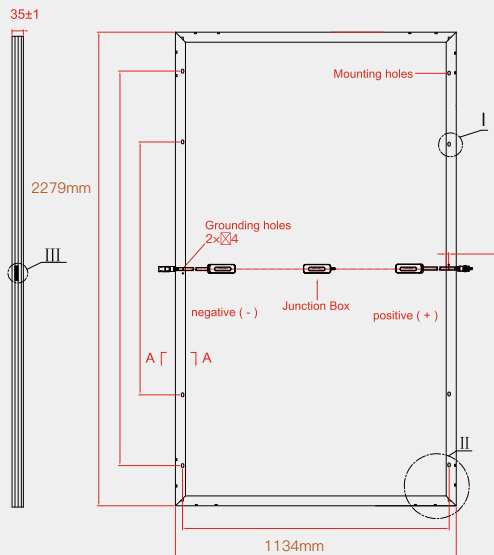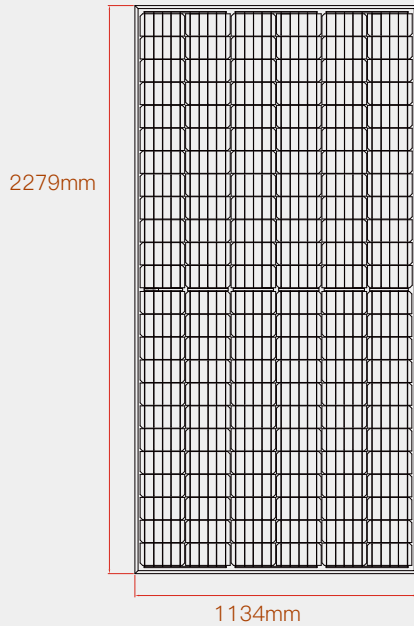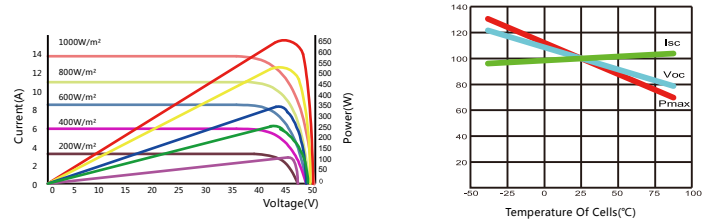

ELECTRICAL SPECIFICATION	Unit	ESM-530S	ESM-535S	ESM-540S	ESM-545S	ESM-550S
Maximum Power (Pmax)	W	530	535	540	545	550
Module Efficiency	%	20.5	20.7	20.9	21.1	21.3
Open Circuit Voltage (Voc)	V	49.25	49.40	49.55	49.70	49.85
Short Circuit Current (Isc)	A	13.73	13.79	13.85	13.91	13.97
Maximum Power Voltage (Vmp)	V	41.40	41.55	41.70	41.85	42.00
Maximum Power Current (Imp)	A	12.81	12.88	12.95	13.03	13.10
Maximum System Voltage	V	ICE 1500VDC/UL1500(VDC)				
Maximum Series Fuse Rating	A	25				

ELECTRICAL DATA@NOCT	ESM-530S	ESM-535S	ESM-540S	ESM-545S	ESM-550S
Pmax[W]	394	398	402	405	409
Vmp[V]	37.84	37.91	38.08	38.25	38.42
Imp [A]	10.42	10.50	10.55	10.60	10.65
Voc[V]	46.50	46.57	46.65	46.74	46.84
Isc[A]	11.07	11.14	11.19	11.26	11.33

NOCT:Irradiance:800W/m², Ambient Temperature:20°C,Air Mass:1.5,Wind Speed:1m/s

MECHANICAL SPECIFICATIONS	
Solar Cell Type	Mono Crystalline 182x91mm
Number of Cells	144pcs (24x6)
Module Size	2279x1134x35mm
Weight	28.5kg
Glass	3.2mm tempered glass
Back Sheet	White or Black
Frame	Anodized aluminum alloy ,silver or black
Junction Box	IP68
Quantity of Diodes	3pcs
Cable	4.0mm ² 1100mm
Connector	MC4 Compatible
Wind/Snow Load	3600pa/5400pa

TEMPERATURE CHARACTERISTIC	
NMOT (Nominal Module Operating Temperature)	41°C (±3°C)
Temperature Coefficient of P _{MAX}	- 0.36%/°C
Temperature Coefficient of U _{OC}	- 0.26%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS	
Operational Temperature	-40 to +85°C
Maximum System Voltage	1500V DC(IEC)
Max Series Fuse Rating	20 A
Snow Load	5400 Pa
Wind Load	2400 Pa

PACKAGING CONFIGURATION	
Modules per box:	31pcs
Number per 20GP:	186pcs
Modules per 40' HQ:	620pcs

*design load with safety factor 1.5
(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)